



**Einbau entsprechend
Krafteinleitungssymbol
Installation according to the
force application symbol**

Das Krafteinleitungssymbol stellt die Richtung der Krafteinleitung dar.
The force application symbol indicates the direction of force application.

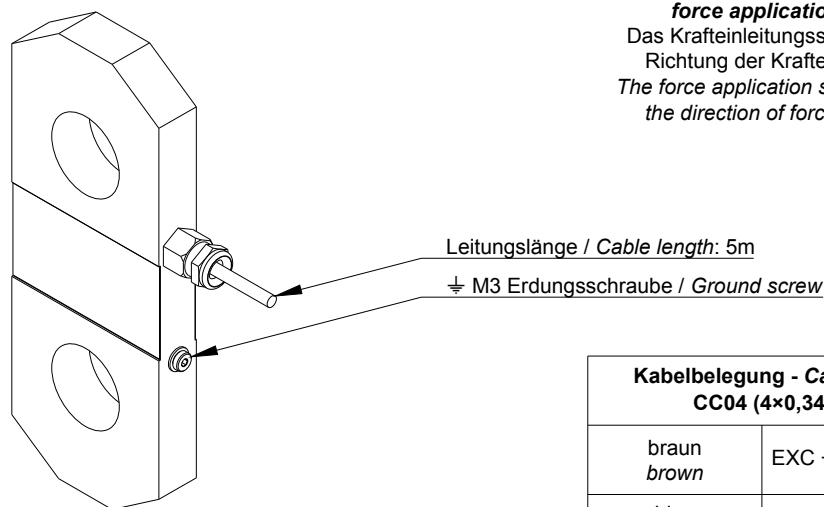

Kabelbelegung - Cable assignment CC04 (4x0,34mm ² PUR)	
braun brown	EXC + (max. 18 VDC)
blau blue	EXC - (GND)
schwarz black	Signal +
weiß white	Signal -
Schirm shield	im Sensor aufgelegt connected to sensor

Zugmesstab Traction measuring rod (tension link)		WLL 3150 kg	 ISETRON Industrie - Sicherheits - Elektronik GmbH Elektronikring 8 D 26452 Sande TEL +49 (0) 4422 631 www.isetron.de info@isetron.de FAX +49 (0) 4422 670			
Typ - type M-0044-1-3150kg-601-CC04V		Empfindlichkeit - sensitivity 1,5 mV/V				
Alle Rechte vorbehalten, auch für den Fall der Patenterteilung oder Gebrauchsmustereintragung. Diese Zeichnung darf ohne unsere vorherige schriftliche Zustimmung weder vervielfältigt noch sonstwie benutzt oder Dritten zugänglich gemacht werden. All rights reserved, including related to patents or registered designs. This drawing must not be reproduced, used otherwise or made available to any third party without our prior written permission.		Material - material 1.4057	Gewicht - weight 0,8 kg	Zeichnungsnummer - drawing number M-0044-1-3150kg-601-CC04V-K-R2		
		Zulässige Abweichungen für Maße ohne Toleranzangabe: DIN 7168 fein Allowed deviations for dimensions without tolerance specification: DIN 7168 fine		Rev. 2	Datum - date 11.10.2022	Seite - page 1/1